




Knee operated hands free basin



SS-KBSB0400

Heavy duty stainless steel hands-free washbasin with knee operated panel. This basin is ideal for the food industry, hospitals, clinics and doctors surgery rooms. We include the water spout, placed in the rear right-hand corner and demand valve. The valve does not mix hot and cold water. The valve uses cold water or pre-mixed blended water only. Using hot water requires either a mechanical mixing valve, SW-5980, CO-EI-X60 or a thermostatic mixing valve, CA-512400, LX-APV-TV-22CXC or W-15/3.

The unit is wall-mounted with four screws. The water flow is reduced by installing the optional reducing filters and aerators. The aerator reduces spashing significantly making hand washing more hygienic.

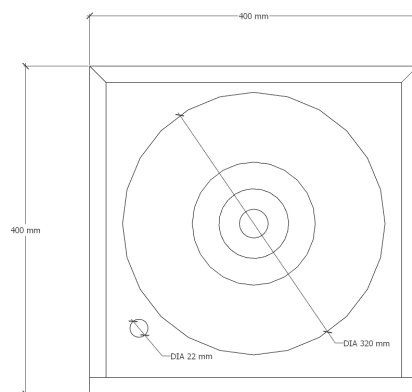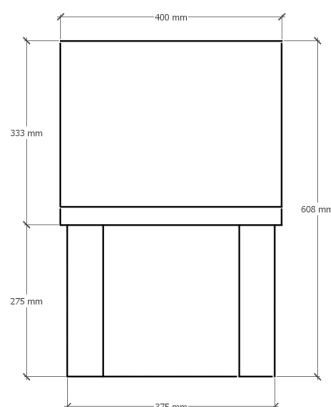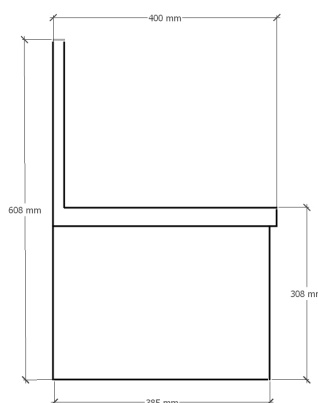

Optional accessories



SW-NE70410298
Aerator with flow rate
7.5-9.0 L/min.



SW-NE70410998
Flow rate 1.3 L/min.
SANS10252 part1 (National Regulation) 6.1.4.4



SW-NE70411198
Flow rate 6 L/min.



SW-NE70411398
Housing only for SW-
NE70410998 & SW-
NE70411198

SCOPE OF DELIVERY:

- 1.2mm Grade 304 (18/10) Stainless Steel.
- Compact design suitable for wall surface mounting
- Basin with pressed bowl.
- Hygienic and vandal resistant.
- Tap hole on right hand side with swivel spout
- 40mm sink waste outlet.
- Integrated wall mounted brackets
- Demand valve included
- Swivel spout included.
- Water saving options available for spout



LX-APV-TV-22CXC
22mm Thermostatic hot & cold mixing valve (automatic non-scalding). Temp adjustable 35-60°C and automatically maintained withing range.



SW-2980
Mechanical manual hot & cold water mixing valve. Fixed ratio between hot and cold water.



SW-STR15
Inline strainer
(Not optional)



SC-AV-15/15
Schell isolating angle valve. Crucial for valve maintenance.



SW-FBC350MFSABS
Braided connector 15mm BSP MxF

Copyright © 2022 www.chilli-b.co.za



AFINDCOM
AFRICAN INDUSTRIAL COMMERCIAL